

Datasheet

Issued: July 7, 2019

Edition: V1.0.0



Figure 1. 8-Zone Dry Contact Module

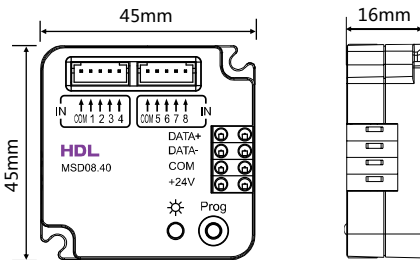


Figure 2. Dimensions-Front View Figure 3. Dimensions-Side View

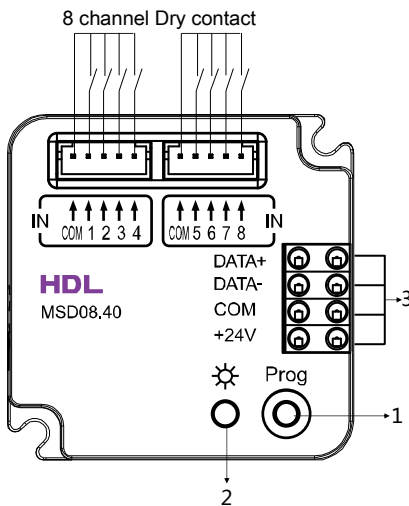


Figure 4. Wiring (1)




Figure 5. Wiring (2)

Overview

8-Zone Dry Contact Module (See Figure 1) supports 8-channel dry contact input with vandal-proof function.

Functions

- 8-channel dry contact input with vandal-proof function.
- Supported switch type: Mechanical switch, Single on, Single off, Single on/off, Combination on, Combination off, Combination on/off, Multi-function, Parallel switch.
- Supported switch mode: Switch mode, Dim up/down, Dim up or Dim down
- Control target type: Scene, Sequence, Universal switch, Single channel lighting control, Broadcast scene, Broadcast channel, Curtain Control, Panel control, GPRS control, Security module, TT player etc.
- Vandal-proof (One parallel contacted 1kΩ resistor required)
- Security function (Security module required)
- Supports online update via HDL Buspro Setup Tool

Important Notes

- Buspro cable - CAT5E or dedicated HDL Buspro cable
- Dry contact signal cable - Shielded cable (less than 50 meters) recommended
- Buspro connection - Series connection (hand-in-hand recommended)
- Vandal-proof - One parallel contacted 1kΩ resistor required
- Installation - Fixed with screws.

Product Information

Dimensions - See Figure 2 - 3

Wiring - See Figure 4 - 5

1. Programming button:

Keep pressing for 2s to modify the ID in Buspro Setup Tool.

Keep pressing the button when power on to enable online updating firmware via HDL Buspro Setup Tool.

2. Indicator:

Flash in green: normal working mode.

Keep on in red: reading/modifying ID.

Flash in red: updating firmware.

3. HDL Buspro interface

One 1kΩ resistor needs to be connected in parallel to dry contact to enable vandal-proof function. The resistor should be as close as possible to the dry contact. Take Channel 4 as an example in Figure 5. There's no need to connect resistor if the vandal-proof function is not applied.

Installation - See Figure 6 - 7

Fix the module to the wall box or the desired position with screws.

Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

Package Contents

HDL-MSD08.40*1 / Buspro connector*1 / 4CH dry contact cable*2 / Datasheet*1




Figure 6




Figure 7

Figure 6 - 7. Installation

Technical Data

Basic Parameters

Working voltage	12~30V DC
Working current	15mA/24V DC
Communication	HDL Buspro

External Environment

Working temperature	-5°C~45°C
Working relative humidity	≤90%
Storage temperature	-20°C~60°C
Storage relative humidity	≤93%

Specifications

Dimensions	45mm×45mm×16mm
Net weight	45g
Housing material	ABS
Installation	Fix with screws (See Figure 6 - 7)
Protection rating (Compliant with EN 60529)	IP20

Name and Content of Hazardous Substances in Products

Components	Hazardous substances					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Chromium VI (Cr (VI))	Poly-brominated biphenyls (PBB)	Poly-brominated diphenyl ethers (PBDE)
Plastic	o	o	o	o	o	o
Hardware	o	o	o	o	-	-
Screw	o	o	o	x	-	-
Solder	x	o	o	o	-	-
PCB	x	o	o	o	o	o
IC	o	o	o	o	x	x

The symbol “-” indicates that the hazardous substance is not contained.

The symbol “o” indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015.

The symbol “x” indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.

HDL Buspro Cable Guide

HDL Buspro	HDL Buspro Cable	CAT5/CAT5E
DATA+	Yellow	Blue/Green
DATA-	White	Blue white/Green white
COM	Black	Brown white/Orange white
24V DC	Red	Brown/Orange

Technical support

E-mail: support@hdlautomation.com

Website: <https://www.hdlautomation.com>

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.